

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 18 TOWNSHIP 15 RANGE 5

DATE: 11-11-02 8-01-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 3-10-01

IN. S.P.C. E ZONE NAD '83

NAME: 15051804

N: 499529.4490(m)

E: 69205.2180(m)

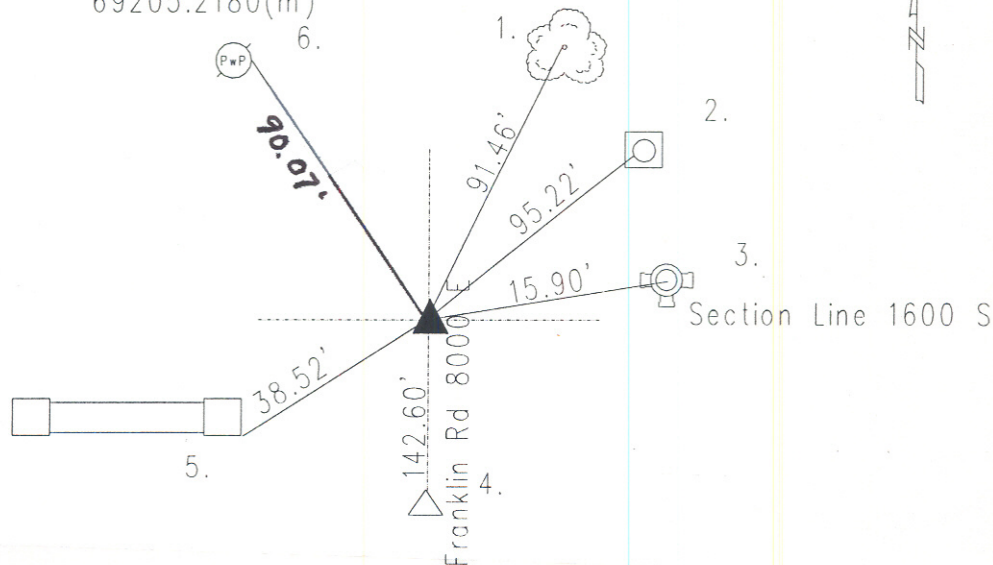

Corner originally set as s post in 1820 by John Hendricks with the following witnesses: 18" beech bearing north 80 degrees, thence east 22 links, and a 18" poplar bearing north 73 degrees, thence west 8 links. (M.C. Atlas p. 14) A survey by D.B.Hasbrook on April 23, 1855 indicates a set rock with the following witnesses: 20" oak bearing south 65.50 degrees, thence east 39 links; and a 22 " oak bearing north 79.50 degrees, thence east 85 links. (Warren Legal Book p. 33) Corner referenced by McConahay on 8/30/74 and called a pipe over stone. Corner referenced by Wilcoxon on 1/20/93 and called a p.k. Nail with washer over pipe over stone. Corner referenced by Wilcoxon on 8/1/96 and called a p.k. Nail with washer. Corner referenced by Whiteside on 3/10/01 and called a p.k. Nail with washer. Corner excavated by Wilcoxon on 10/28/02 and a cast iron Harrison Monument was set in position as the corner.

15051804

REF.	DISTANCE	DESCRIPTION
1.	91.46'	Boat spike W multi-mulberry 6"up
2.	95.22'	Face of steel flag pole
3.	15.90'	Top nut of fire hydrant
4.	142.60'	Due S to E Q 13-15-4 (Harrison)
5.	38.52'	SE corner of brick sign
6.	90.07'	PK nail E PwP#38-579 4"up
		Mag nail w/bw